


# COMPOSITE PLUG

## SCBP COMPOSITE BRIDGE PLUG

Model SCBP Composite Bridge Plugs are used for temporary or permanent isolation of oil, gas and water, such as zone isolation, formation fracturing and acidizing. These easy drillable bridge plugs can be used for multi-zone fracturing, so it is an especially good choice for shale gas exploration.

## SPECIAL FEATURES

- Can be set directly with SWSG/SWSB wireline or SHSG/SHSB hydraulic setting tool
- Easy for mill out
- Slope bottom can stop the rotation of the bridge plug
- The working temperature is below 150°C(300°F)

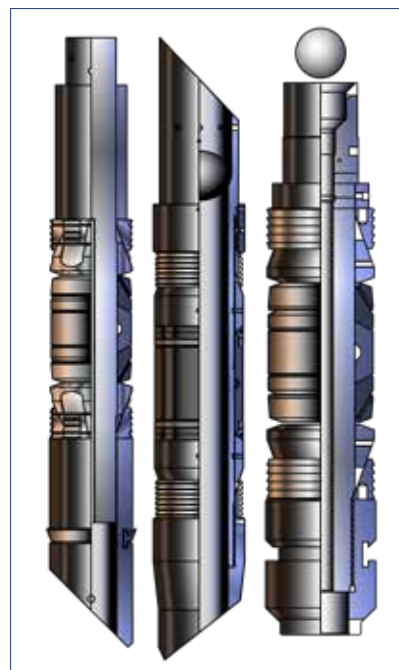

MODEL	SIZE	CASING WT	DIMENSION			SETTING RANGE		RELEASE FORCE	PRES-SURE	TEMP
			OD	ID	LENGTH	MIN	MAX			
			INCH	INCH	INCH	INCH	INCH			
SCP-P (SOLID BODY)	4"	5.6~14#	3.22	~	23.64	3.32	3.548	33,000	10K	300
	4 1/2"	9.5~15.1#	3.61	~	23.01	3.826	4.09	33,000	10K	300
	5"	11.5~21#	3.92	~	26.71	4.126	4.56	33,000	10K	300
	5 1/2"	15.5~23#	4.39	~	26.71	4.67	4.95	33,000	10K	300
	7"	23~32#	5.63	~	34.92	6.094	6.366	55,000	10K	300
	9 5/8"	43.50~53.50#	8.13	~	40	8.54	8.76	55,000	5 K	300
SCP-F(-NO-SOLID BODY, BALL TYPE)	4"	5.6~14#	3.19	0.75	23.65	3.32	3.548	33,000	10K	300
	4 1/2"	9.5~15.1#	3.61	0.75	23.01	3.826	4.09	33,000	10K	300
	5"	11.5~21#	3.92	0.75	26.71	4.126	4.56	33,000	10K	300
	5 1/2"	15.5~23#	4.39	1	26.71	4.67	4.95	33,000	10K	300
	7"	23~32#	5.63	1.5	34.38	6.091	6.366	55,000	10K	300
SCP-D(CAGE TYPE)	4"	5.6~14#	3.19	0.75	23.65	3.32	3.548	33,000	10K	300
	4 1/2"	9.5~15.1#	3.61	0.75	23.01	3.826	4.09	33,000	10K	300
	5"	11.5~21#	3.92	0.75	26.71	4.126	4.56	33,000	10K	300
	5 1/2"	15.5~23#	4.39	1	26.49	4.67	4.95	33,000	10K	300
	7"	23~32#	5.63	1.5	34.38	6.091	6.366	55,000	10K	300